
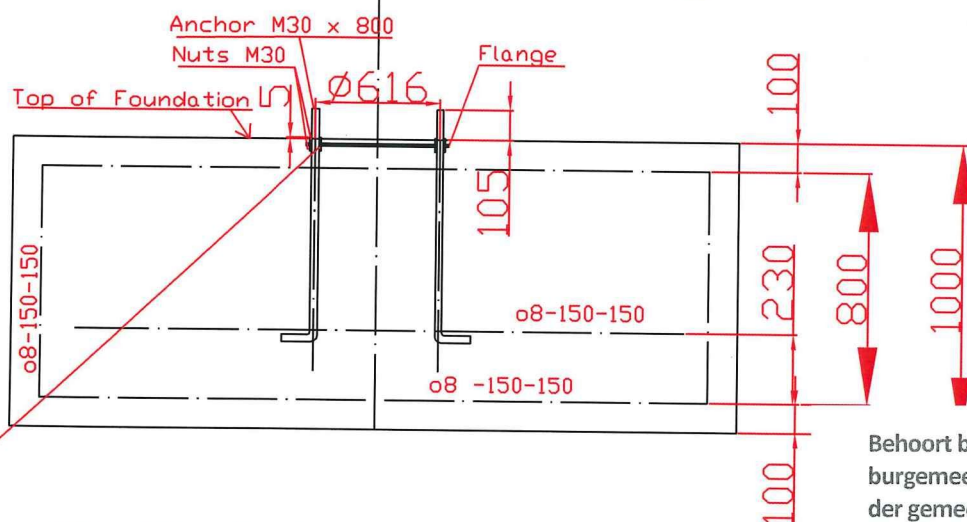


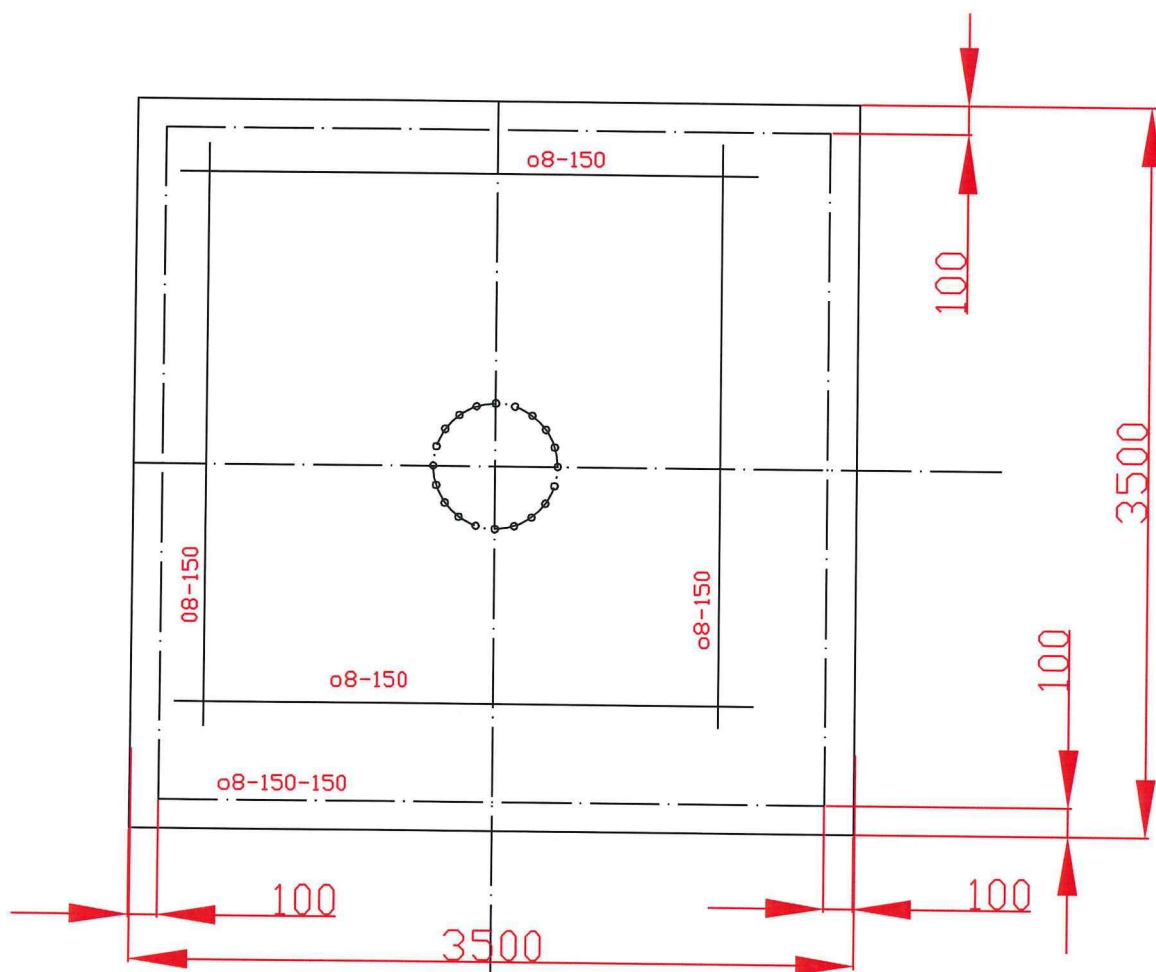

Anchors M30 x 800 x 100 16 pieces
Nuts M30 - 16 x 2 peices

notes

- concrete requirements: 2,76 m³
 - cement 0,46 m³
 - sand 0,92 m³
 - gravel 1,38 m³
- reinforcement steel FeB360, covered with a minimum of 40 mm concrete
- all pads must be level and be at the same elevation
- guy wire attachments and other fixtures are bolted to the pads using hilti type concrete fasteners

10N = 1kg
1m³ concrete = 24000N

Behoort bij besluit van
burgemeester en wethouders
der gemeente DUIVEN
van 20 oktober 2015

Zaaknr. 15SZ0832

Besluitnr. 15BSL-SXO-0607 / 15BW0432

mij bekend;

De secretaris;

ONTVANGEN 25 JUN 2015

15 SX00 5217

Foundation for single leg tower 15 - 18m Fortis Alizé