



BITZER Output data

Created on : 25.03.2020 16:04:34

*Deze Compressor met vat komt binnen te
staan in speciale geluiddempende omkasting.*

*De onttrokken warmte wordt afgevoerd aan buiten
opgestelde condensor (speciaal geselekteerd)
lang voeren.*

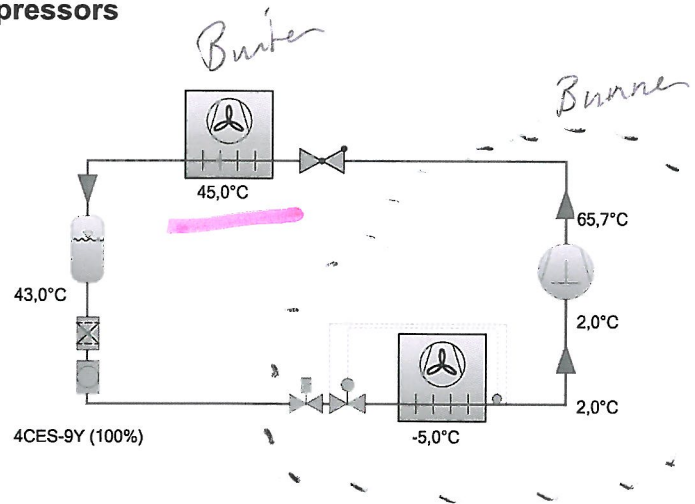


Table of content

Project survey.....	3
Selection: Semi-hermetic Reciprocating Compressors.....	4
Technical Data: 4CES-9Y.....	5
Information: Semi-hermetic Reciprocating Compressors.....	6

**Selection: Semi-hermetic Reciprocating Compressors****Input Values**

Compressor model	4CES-9Y
Mode	Refrigeration and Air conditioning
Refrigerant	R513A
Reference temperature	Mean temperature
Evaporating SST	-5,00 °C
Condensing SDT	45,0 °C
Liq. subc. (in condenser)	2,00 K
Suction gas temperature	2,00 °C
Operating mode	Auto
Power supply	400V-3-50Hz
Capacity control	100%
Useful superheat	100%


**Result**

Compressor	4CES-9Y-40S
Capacity steps	100%
Cooling capacity	12,58 kW
Cooling capacity *	12,86 kW
Evaporator capacity	12,58 kW
Power input	4,69 kW
Current (400V)	9,14 A
Voltage range	380-420V
Condenser capacity	17,27 kW
COP/EER	2,69
COP/EER *	2,74
Mass flow	369 kg/h
Operating mode	Standard
Discharge gas temp. w/o cooling	65,7 °C

Benodigde condensor capaciteit

Tentative Data.

*According to EN12900 (20°C suction gas temp., 0K liquid subcooling)

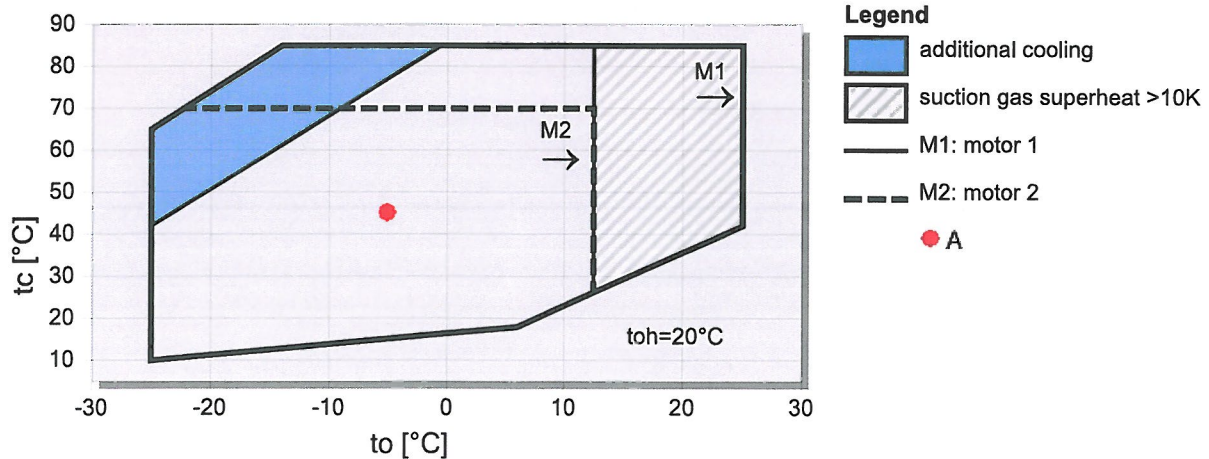Application Limits 100%



BITZER Software v6.13.0 rev2404

Snoei selectie koelcel

25.03.2020 / All data subject to change.

3 / 7

Project survey

Selected compressors


Semi-hermetic Reciprocating Compressors

1x 4CES-9Y



Technical Data: 4CES-9Y

Dimensions and Connections

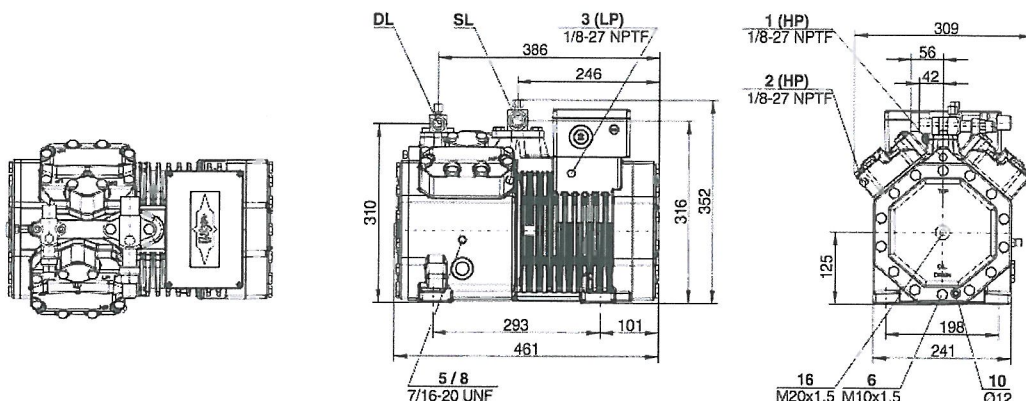

Technical Data

Technical Data

Displacement (1450 RPM 50Hz)	32,48 m ³ /h
Displacement (1750 RPM 60Hz)	39,20 m ³ /h
No. of cylinder x bore x stroke	4 x 55 mm x 39,3 mm
Weight	90,5 kg
Max. pressure (LP/HP)	19 / 32bar
Connection suction line	28 mm - 1 1/8"
Connection discharge line	22 mm - 7/8"
Oil type R134a/R407C/R404A/R507A/R407A/R407F	BSE32(Standard) R134a tc>70°C: BSE55 (Option)
Oil type R22 (R12/R502)	B5.2 (Option)
Oil type R1234yf/R1234ze	BSE32 (Standard) R1234ze tc>70°C & to>0°C: BSE55 (Option) R1234ze to>15°C: BSE85K (Option)

Motor data

Motor version	1
Motor voltage (more on request)	380-420V Y-3-50Hz
Max operating current	20.2 A
Starting current (Rotor locked)	82.4 A
Max. Power input	11,3 kW

Extent of delivery (Standard)

Motor protection	SE-B1
Enclosure class	IP66
Vibration dampers	Standard
Oil charge	2,00 dm ³
Discharge shut-off valve	Standard
Suction shut-off valve	Standard

Available Options

Discharge gas temperature sensor	Option
Capacity control	100-50% (Option)
Capacity Control - infinite	100-10% (Option)
Additional fan	Option
Crankcase heater	0..120 W PTC (Option)
Oil level monitoring	OLC-K1 (Option)

Sound measurement

Sound power level (+5°C / 50°C)	73,2 dB(A) @ 50Hz
Sound power level (-10°C / 45°C)	74,1dB(A) @ 50Hz
Sound power level (-35°C / 40°C)	76,5 dB(A) @ 50Hz
Sound pressure level @ 1m (+5°C / 50°C)	65,2 dB(A) @ 50Hz
Sound pressure level @ 1m (-10°C / 45°C)	66,11dB(A) @ 50Hz
Sound pressure level @ 1m (-35°C / 40°C)	68,5 dB(A) @ 50Hz

*Runnen opgesteld
in special omkasting*



Semi-hermetic Reciprocating Compressors

Motor 1 = e.g. 4TES-12 with 12 "HP", primary for air-conditioning (e.g. R22, R407C) and air-conditioning with R134a at high ambient temperatures.

Motor 2 = e.g. 4TES-9 with 8 "HP", universal Motor for medium and low temperature application (e.g. R404A, R507A, R407A, R407F) and air-conditioning with R134a

Motor 3 = e.g. 4TES-8, for medium temperature applications and R134a

For more information concerning the application range use the "Limits" button.

Operation modes 4VES-7 to 6FE-44 and 44JE-30 to 66FE-88 with R407F/R407A/R22

CIC = liquid injection with low temperature application, suction gas cooled motor.

ASERCOM certified performance data

The Association of European Refrigeration Component Manufacturers has implemented a procedure of certifying performance data. The high standard of these certifications is assured by:

- * plausibility tests of the data performed by experts.
- * regular measurements at independent institutes.

These high efforts result in the fact that only a limited number of compressors can be submitted. Due to this not all BITZER compressors are certified until now. Performance data of compressors which fulfil the strict requirements may carry the label "ASERCOM certified". In this software you will find the label at the respective compressors on the right side below the field "result" or in the print out of the performance data. All certified compressors and further information are listed on the homepage of ASERCOM.

Condensing capacity

The condensing capacity can be calculated with or without heat rejection. This option can be set in the menu Program ☐ Options. The heat rejection is constantly 5 % of the power consumption. The condensing capacity is to be found in the line Condensing cap. (with HR) resp. Condensing capacity.

Data for sound emission

Data based on 50 HZ application (IP-units 60 Hz) and R404A if not declared.

Sound pressure level: values based on free field area conditions with hemispherical sound emission in 1 meter distance.

General remarks regarding sound data

Listed sound data were measured under testing conditions in our laboratory. For this purpose the free-standing test sample is mounted on a solid foundation plate and the pipework is connected vibration-free to the largest extent possible. Suction and discharge lines are fixed in a flexible configuration, such that a transmission of vibrations to the environment can be largely excluded. In real installations considerable differences might be observed, compared to the measurements in the laboratory. The airborne sound emitted by the compressor can be reflected from surfaces of the system and this may increase the airborne sound level measured close to the compressor. Vibrations caused by the compressor are also transferred to the system by the compressor feet and piping depending on the damping ratio of the fixings. Thus, the vibrations can induce other components to such an extent that these components contribute to an increase in airborne sound emission. If required, the transfer of vibrations to the system can be minimized by suitable fixing and damping elements.


Legend of connection positions according to "Dimensions":

- 1 High pressure connection (HP)
- 2 Connection for discharge gas temperature sensor (HP) (for 4VE(S)-6Y .. 4NE(S)-20(Y) connection for CIC sensor as alternative)
- 3 Low pressure connection (LP)
- 4 CIC system: injection nozzle (LP)
- 4b Connection for CIC sensor
- 4c Connection for CIC sensor (MP / operation with liquid subcooler)
- 5 Oil fill plug
- 6 Oil drain
- 7 Oil filter (magnetic screw)
- 8 Oil return (oil separator)
- 8* Oil return with NH3 and insoluble oil
- 9 Connection for oil and gas equalization (parallel operation)
- 9a Connection for gas equalization (parallel operation)
- 9b Connection for oil equalization (parallel operation)
- 10 Oil heater connection
- 11 Oil pressure connection +
- 12 Oil pressure connection -
- 13 Cooling water connection
- 14 Intermediate pressure connection (MP)
- 15 Liquid injection (operation without liquid subcooler and with thermostatic expansion valve)
- 16 Connection for oil monitoring (opto-electrical oil monitoring "OLC-K1" or differential oil pressure switch "Delta-PII")




- 17 Refrigerant inlet at liquid subcooler
 - 18 Refrigerant outlet at liquid subcooler
 - 19 Clamp space
 - 20 Terminal plate
 - 21 Maintenance connection for oil valve
 - 22 Pressure relief valve to the atmosphere (discharge side)
 - 23 Pressure relief valve to the atmosphere (suction side)
 - 24 IQ MODULE
 - SL Suction gas line
 - DL Discharge gas line
- Dimensions can show tolerances according to EN ISO 13920-B.

HORIZONTAL UNIT

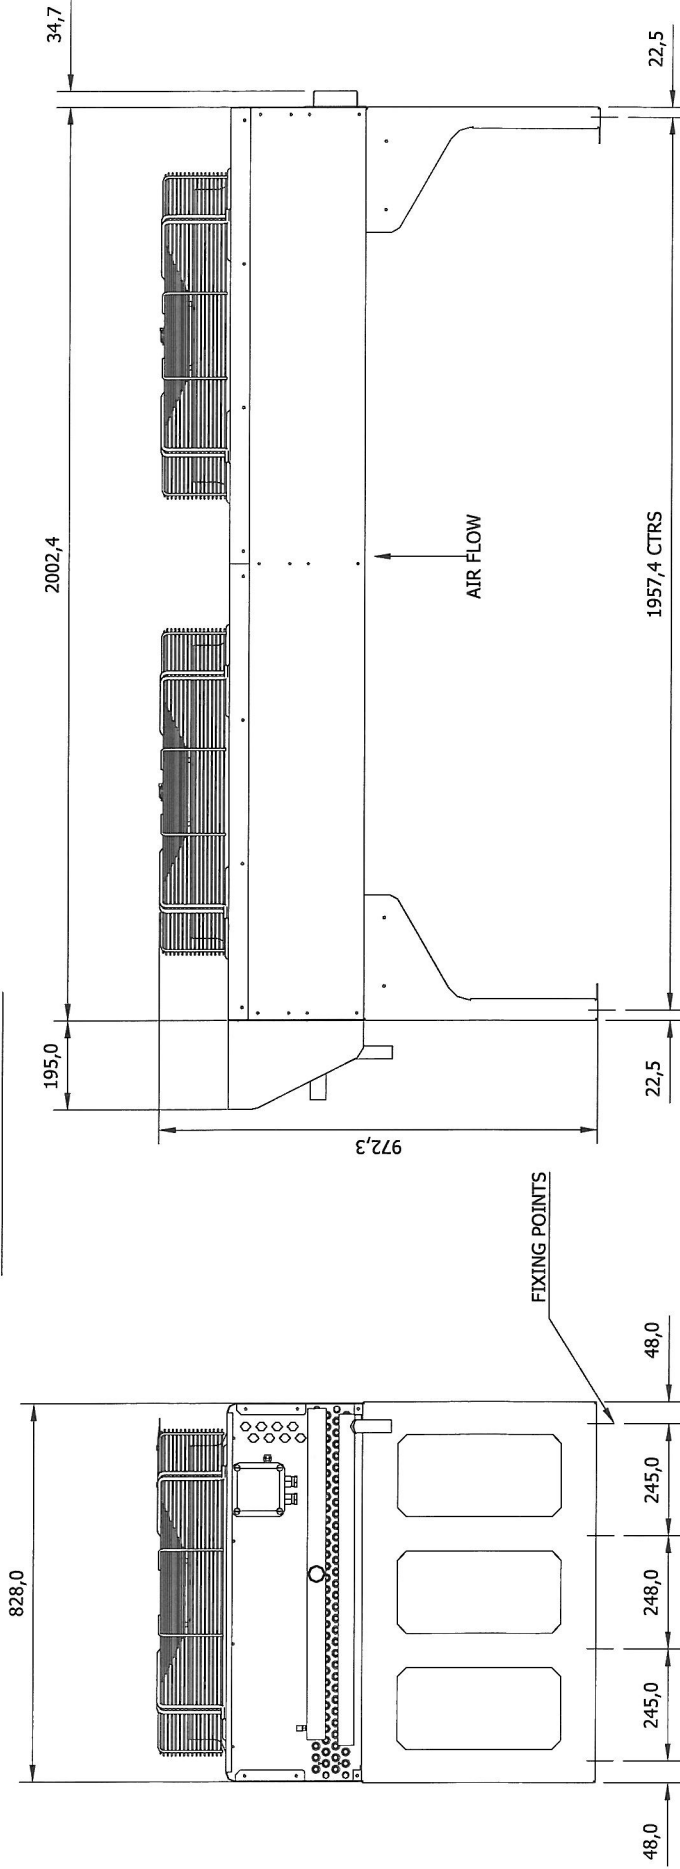

VERTICAL UNIT (WALL MOUNTED)

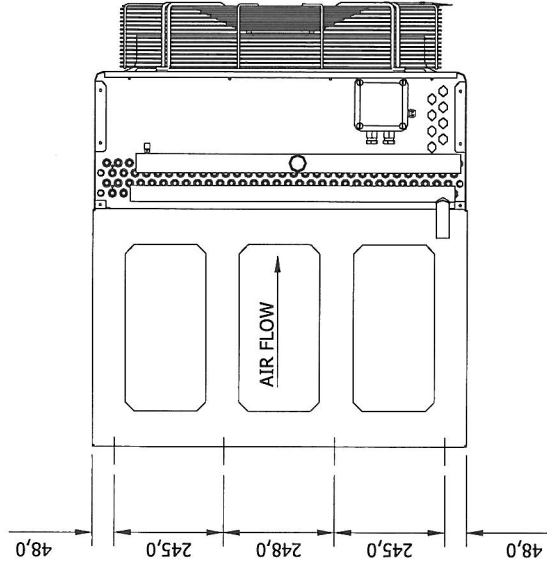

KOAL-C-RF-SJ102L4H-063L051

L -	2232 mm	C -	mm	E1 -	mm	F1 -	mm
B -	828 mm	E -	mm	E2 -	mm	F2 -	mm
H -	970 mm			E3 -	mm		

Subject to modification!

Drawn	name drawing	Scale	1:10	Projection	DO NOT SCALE
Checked					
Description					
Client					
Client ref.					
Group					
Purchase order no.					
Project no.					

Goedhart
Sint Maartensdijk

Form
A2

GOEDHART PRODUCT CATALOGUS 2019.02

Klant : SRZKT

Project : Snoei Koelcel spec selectie low noise

Pos. :

Aantal : 1

Datum: 25-3-2020

Verticale luchtstroming Goedhart KOAL-C-RF-SJ102L4H-063L051

Selectiegegevens

Capaciteit	kW	23,00	Koudemiddel		R-513A
Luchthoeveelheid	m³/h	6840	Heetgas in temperatuur	°C	72,0
Lucht temperatuur In	°C	37,0	Calculation mode		Mid point
			Condensatietemperatuur	°C	47,0
			Sub Cooling		Nee

Technische gegevens


Lamel afstand	mm	2,1	Blok		Cu / AlMg
Oppervlak	m²	124,6	Omkastig		gegalvaniseerd
Volume	dm³	21,2	Afwerking		Kieselgrijs (RAL 7032)
Gewicht (leeg) zonder opties	kg	102	Geluidsdruk niveau - afstand	dB(A)-m	33,0 @ 5,0
Intrede / Uittrede aansluiting	mm	35 / 28	Energie klasse		A+

Ventilator(en)

Aantal ventilatoren		2	ErP Compliance		2015
Data per ventilator:			Spanning - Fase - Frequentie	V-#-Hz	230 -1- 50
Ventilator diameter	mm	630 [EBM]	Beschermingsklasse		IP54
Ventilator toerental	tpm	510 [EC]			
Opgenomen vermogen	kW	0,067			
Nominale stroom	A	0,6			

Afmetingen zonder opties (circa) Wijzigingen voorbehouden!

L -	2232 mm	C -	mm	E1 -	mm	F1 -	mm
B -	828 mm	E -	mm	E2 -	mm	F2 -	mm
H -	970 mm			E3 -	mm		

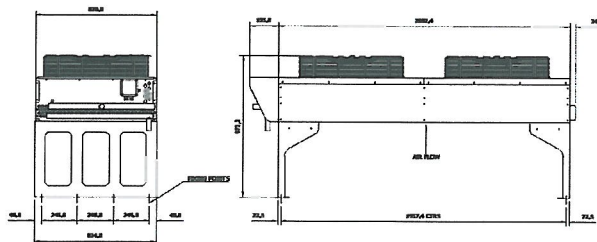

* Het geluidsdruk niveau wordt berekend in overeenstemming met EN13487 [+2 dB(A)], vrije veld conditie, zonder reflectie. Praktische waarden kunnen afwijken als gevolg van de omstandigheden ter plaatse. De geluidsdruk, gewichten en afmetingen aangegeven zijn geldig voor luchtkoelers zonder extra opties.

Energie klasse: A+ - extreem laag

