

Smart String Inverter

SUN2000-100KTL-USH0



Behoort bij beschikking/schrijven van
burgemeester en wethouders van de
gemeente Twenterand,

d.d. 5 februari 2020
nr. 2019.HZ_WABO.278


Team Omgeving

Smart

- 12 strings intelligent monitoring and fast trouble-shooting
- Power Line Communication (PLC) supported
- Smart I-V Curve Diagnosis supported

Efficient

- Max. efficiency 99.0%
- CEC. efficiency 98.5%
- 6 MPPT per unit, effectively reducing string mismatch

Safe


- DC AFCI compliant to UL 1699B Type I
- Residual Current Monitoring Unit (RCMU) integrated inside
- Fuse free design

Reliable

- Natural cooling technology
- Protection degree of Type 4X
- Type II surge arresters for both DC and AC

Behoort bij beschikking/schrijven van
burgemeester en wethouders van de
gemeente Twenterand,

d.d. 27 maart 2019
nr. 2019.HZ_WABO.062


Team Omgeving

Always Available for Highest Yields


solar.huawei.com/na

Smart String Inverter (SUN2000-100KTL-USH0)



Technical Specifications	SUN2000-100KTL-USH0
	Efficiency
Max. Efficiency	99.0%
CEC Efficiency	98.5%
	Input
Max. Input Voltage	1,500 V
Max. Current per MPPT	22 A
Max. Short Circuit Current per MPPT	40 A
Start Voltage	650 V
MPPT Operating Voltage Range	600 V ~ 1,500 V
Full Power MPPT Voltage Range	880 V ~ 1,300 V
Number of Inputs	12
Number of MPP Trackers	6
	Output
AC Active Power	100,000 W
Max. AC Apparent Power	100,000 VA @40°C, 90,000 VA @50°C
Max. AC Active Power (cosφ=1)	100,000 W
Rated Output Voltage	800 V, 3W + PE
Rated AC Grid Frequency	60 Hz
Rated Output Current	72.9 A
Max. Output Current	72.9 A
Adjustable Power Factor Range	0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion	< 3%
	Protection
DC Arc Fault Circuit Interrupter	Yes, compliant to UL 1699B Type I
Input-side Disconnection Device	Yes
Anti-islanding Protection	Yes
DC Reverse-polarity Protection	Yes
AC Overcurrent Protection	Yes
PV-array String Fault Monitoring	Yes
DC Surge Arrester	Type II
AC Surge Arrester	Type II
DC Insulation Resistance Detection	Yes
Residual Current Monitoring Unit	Yes
	Communication
Display	LED Indicators, Bluetooth + APP
USB	Yes
RS485	Yes
Power Line Communication (PLC)	Yes
	General
Dimensions (W x H x D)	1,075 x 605 x 310 mm (42.3 x 23.8 x 12.2 inch)
Weight (with mounting plate)	77 kg (169.8 lb.)
Operating Temperature Range	-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method	Natural Convection
Relative Humidity	0 ~ 100%
DC Connector	Staubli MC4
AC Connector	Waterproof Cable Connector + Terminal Clamps
Protection Degree	Type 4X
Topology	Transformerless
	Standard Compliance (more available upon request)
Certificate	UL 1741, UL 1699B, UL 62109-1, CSA C22.2 #107.1-16, FCC Part 15
Grid Code	IEEE 1547, IEEE 1547a

Efficiency Curve

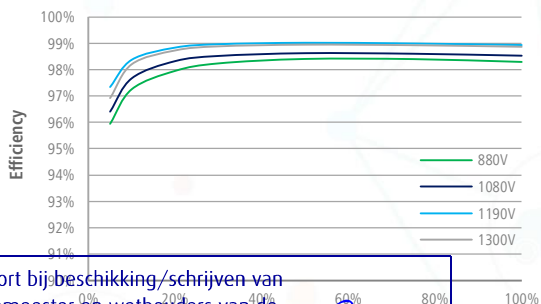

Behoort bij beschikking/schrijven van burgemeester en wethouders van de gemeente Twenterand,

d.d. 27 maart 2019
nr. 2019.HZ_WABO.062

Team Omgeving

Circuit Diagram

